

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :

C11C 5/00

A1

(11) International Publication Number:

WO 92/08776

(43) International Publication Date:

29 May 1992 (29.05.92)

(21) International Application Number: PCT/SE91/00757

(22) International Filing Date: 11 November 1991 (11.11.91)

(30) Priority data:  
9003622-9

14 November 1990 (14.11.90) SE

(71)(72) Applicant and Inventor: JOHANSSON, Leif [SE/SE];  
Pär Lagerkvists väg 7 C, S-352 43 Växjö (SE).

(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CI (OAPI patent), CM (OAPI patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, ML (OAPI patent), MN, MR (OAPI patent), MW, NL, NL (European patent), NO, PL, RO, SD, SE, SE (European patent), SN (OAPI patent), SU\*, TD (OAPI patent), TG (OAPI patent), US.


Published

*With international search report.  
In English translation (filed in Swedish).*

(54) Title: SELF-EXTINGUISHING CANDLE

## (57) Abstract

Self-extinguishing candle comprising a body (1) of candle material having integrated therein a wick (2). Wick is enclosed throughout a portion of its length by a sleeve (3) serving to prevent the candle-flame (4) from continuing to burn down the wick, as well as to drain and convey the molten or liquid candle material accumulated round the sleeve and the wick to the candle-flame (4). The novelty of the invention lies in the fact that the sleeve (3) is placed between the body (1) of the candle material and the wick (2) and that the sleeve (3) consists of a difficultly inflammable material of good thermal conductivity.

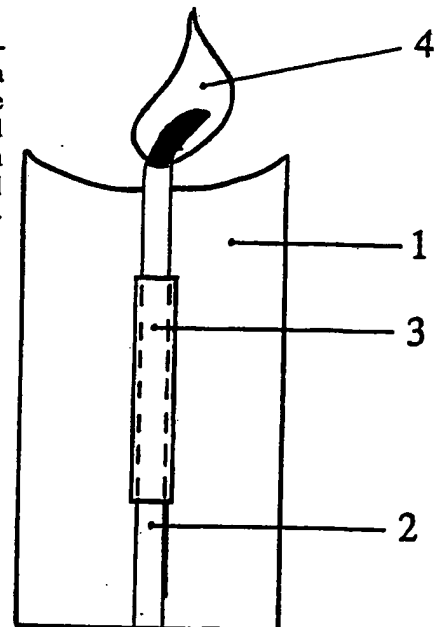

BEST AVAILABLE COPY

# + DESIGNATIONS OF "SU"

Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

## *FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LJ	Liechtenstein	SU <sup>+</sup>	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

## SELF-EXTINGUISHING CANDLE

### BACKGROUND

The background of the development of self-extinguishing candles is primarily one of security. In cases where candles are used together with candle-rings, moss, wooden candle-sticks etc., it is of the greatest importance that the candle is extinguished before it has burnt down to such a level where the surrounding material can be ignited by the candle-flame. Also practical aspects such as the difficulty of removing a fully spent candle from the candle-stick also constitute a background to the invention.

Candles which are self-extinguishing at a predestined point are previously known in different designs. Besides candles with mechanical extinguishing arrangements there are candles which are self-extinguishing due to the fact that the wick or the candle-material is manipulated at a predestined point. It is consequently already known to impregnate the wick with substances which make it less inclined to burn (for example metallic salts, water-glass). It is also known to bring about self-extinction by creating a cavity in the candle-material round the wick and filling this with extinguishing liquid or a gas-producing and choking substance, for example alkali bicarbonate.

This invention is intended to be applied to a candle comprising a body of candle-material with an integral wick. The purpose of the invention is to bring about self-extinction of the candle-flame when it has burnt down to a certain point on the wick. The wick is partially enclosed in a specially designed sleeve. The purpose of this invention is to provide a self-extinguishing candle of reliable function, extinguishing calmly without causing any disadvantages such as spattering or unnecessary emission of fumes. Furthermore the candle shall extinguish at a predestined level, and the wick shall be kept centered in the candle body.

A further purpose of the invention is to provide a self-extinguishing candle of a function/design which is practical to produce. The invention will be described in more detail below with reference to the appended drawings.

### DESCRIPTION OF THE SLEEVE

The sleeve (3), Fig. 1, is placed on/around the wick (2), which means that it is located between the body of candle-material (1) and the wick (2). The sleeve is made of a material which is difficult to ignite and which conducts heat sufficiently to liquefy the candle-material in a zone (5) round the sleeve (3) along the whole or part of its length, Figs. 2, 3.

An example of a suitable sleeve material is thin sheet-metal.

The sleeve should be designed in its upper part so that the candle-flame (4) stops there on its progression down the wick. This can, for example, be achieved by the sleeve enclosing the wick so closely that the candle-flame cannot burn along the wick inside the sleeve due to, for example, lack of oxygen. The sleeve should also be of such a design and of such dimensions, or be equipped with a suitable arrangement, to allow the molten/liquid candle-material to be drained round the sleeve/wick and conveyed to the candle-flame by means of the suction force the wick/candle-flame exerts and/or in other ways, for example due to capillary forces (for example by channel/channels in the sleeve).

To ensure that the wick (2) and the sleeve (3) maintain their position in the candle body when a cavity has been formed, Fig. 4, the sleeve is equipped with an anchorage (6) which extends in the candle body in such a way that it is not entirely surrounded by molten or sufficiently softened candle-material. The sleeve can also be designed in such dimensions that its lower part is not surrounded by molten or sufficiently softened candle-material, Fig. 5. Another way of ensuring that such molten candle-material does not appear round the lower part of the sleeve is to manufacture the sleeve in different materials, where the lower part/parts have low thermal conductivity, Fig. 6.

An example of a sleeve design where the wick/candle-flame sucks up molten/liquid candle-material is through aperture/apertures in the sides of the sleeve at a suitable distance from the upper edge of the sleeve, Figs. 7, 8. The wick/candle-flame then sucks up molten/liquid candle-material through the aperture/apertures.

5

An example of the sleeve design where a channel/channels are formed in the sleeve is shown in Fig. 9. The molten candle-material is here conveyed to the wick/candle-flame by capillary forces prevailing in the channels. The channels may also contain materials with suction capability and thus facilitate the drainage and conveyance of molten/liquid candle-material.

10

The channel/channels can also be combined with an aperture/apertures in the sleeve, Figs. 10, 11, 12. The sleeve may also be manufactured from materials which have such a structure as to permit the molten candle-material to pass through, for example porosities, and thence on to the wick/candle-flame.

15

## DESCRIPTION OF THE PROCESS OF THE INVENTION

The candle-flame (4) burns in the usual way down the wick (2), Fig. 13, until it reaches the upper part of the sleeve (3), Fig. 14, which is placed on or round the wick (2). The candle-flame is prevented from continuing to burn along the wick (2), here enclosed by the sleeve (3). This enclosure  
5 prevents the candle-flame (4) from burning inside the sleeve (3) due to, for example, lack of oxygen. The candle-flame (4) has thus been stopped at that part of the wick (2) which is located at the upper edge of the sleeve (3). However, the wick/candle-flame is still able to absorb and make use of the surrounding molten/liquid candle-material. The candle will not go out by  
10 itself until the candle-flame is supplied with an insufficient amount of fuel (candle-material) or until the part of the wick located at the upper edge of the sleeve is consumed (burnt).

Due to its proximity to the candle-flame (4), the sleeve (3) is heated to a temperature above the melting-point of the candle-material. Thermal conductivity, heat transfer, heat radiation etc. cause the candle-material nearest to  
15 the sleeve (3) to melt or liquefy, and a zone of molten/liquid candle-material (5) is formed, Fig. 15. By the design of the sleeve, the molten/liquid candle-material is conveyed to the candle-flame which is located at the upper edge of the sleeve, where it is burnt up. In this way, the molten/liquid candle-material (5) is drained around the sleeve and the wick, thus forming a cavity  
20 in the candle body, Figs. 16, 17. This causes the candle to become self-extinct, Fig. 18, since the wick/candle-flame is not subsequently supplied with any candle-material. The process is illustrated in more detail in Figs. 19, 20, 21 for one variant of the sleeve. The sleeve can also be designed so  
25 that other mechanisms contribute to the drainage effect as well, see below. The wick (2) with the sleeve (3) is kept centered in place by the anchorage (6). Another way of keeping the wick and the sleeve centered is to design the sleeve so that its lower part is constantly surrounded by solid or viscous candle-material, Figs. 22, 23, 24, 25, 26, 27. The process is shown in more  
30 detail in Figs. 28, 29, 30.

5 The candle-flame (4) which is located at the upper edge of the sleeve (3) gives off heat that to some extent continues to melt the remaining solid candle-material at the upper part of the candle body and on the inside of the cavity walls. This flows down and collects in the previously molten candle-material or in the bottom of the cavity.

10 The drainage/conveyance of molten candle-material (5) to the wick/candle-flame depends on its suction capability and can be achieved by special means, for example apertures or channels in the sleeve (3). Also mechanisms, for example capillary forces, can act to drain molten/liquid candle-material (5) to the wick/candle-flame. This mechanism thus is a result of the shape and design of the sleeve. Fig. 31 illustrates how the combination of the wick/candle-flame suction capability and capillary forces can contribute to the drainage.

15 When such temperature conditions have been established in the candle that the candle-material cannot be transported to the candle-flame, since it has now become solid or viscous in the proximity of the wick and sleeve, the candle-flame then is extinguished due to lack of fuel (candle-material), Figs. 18, 27.

20 As mentioned earlier, the sleeve (3), placed on the wick (2), prevents the candle-flame (4) from burning further down the wick than to the upper edge of the sleeve. During the time the candle-flame at this point is supplied with fuel (molten candle-material), the wick is in this part gradually consumed (burnt). If this continues for a sufficiently long time, the candle-flame may be extinguished also for this reason.

25 The above mentioned causes of extinction may also act together to extinguish the candle-flame. For example, the wick at the upper edge of the sleeve, where the candle-flame is flaming out from the wick, becomes progressively smaller due to the fact that it is being consumed. This also means that the candle-flame becomes smaller and generates less heat,


which in turn leads to the candle-material becoming viscous or solid, so that conveyance of candle-material to the wick/candle-flame is reduced or terminated. Another example of the coaction of these features is the following; When transport of candle-material to the wick/candle-flame is reduced or terminated, the wick is consumed (burnt) more rapidly.



**CLAIMS**

1. A self-extinguishing candle, comprising a body of candle-material (1) having integrated therein a wick (2) which is enclosed throughout a portion of its length by a sleeve (3), c h a r a c t e r i s e d in that the sleeve (3) is disposed between the body of candle material (1) and the  
5 wick (2), and that the sleeve, at least throughout a portion of its length, closely encloses the wick, said sleeve (3) consisting of a difficultly inflammable material of good thermal conductivity and being formed with an aperture/apertures in its lateral face/faces and/or with a channel/channels for conducting molten or liquid candle material to  
10 the wick and/or the flame.
2. Candle as claimed in claim 1, c h a r a c t e r i s e d in that the sleeve (3) is so designed that a portion of the sleeve (3) or an element (6) applied to the sleeve (3) is not surrounded by molten or softened candle material, whereby the sleeve (3) is anchored in the candle body (1) and  
15 held centered in the candle.
3. Candle as claimed in claim 1, c h a r a c t e r i s e d in that the sleeve (3) is made of a material having such a structural composition as to allow molten or liquid candle material to pass through said material to the wick.
- 20 4. Candle as claimed in claim 1, c h a r a c t e r i s e d in that the sleeve (3) is made of a material having such a structural composition as to allow molten or liquid candle material to pass through said material to the flame.

1/13

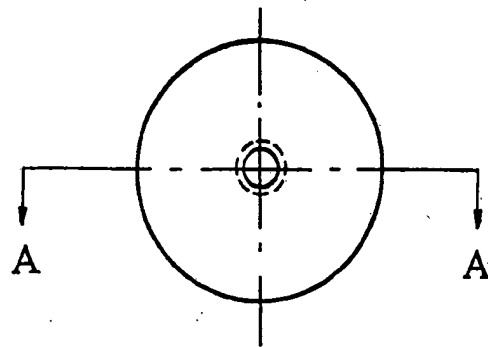

A - A

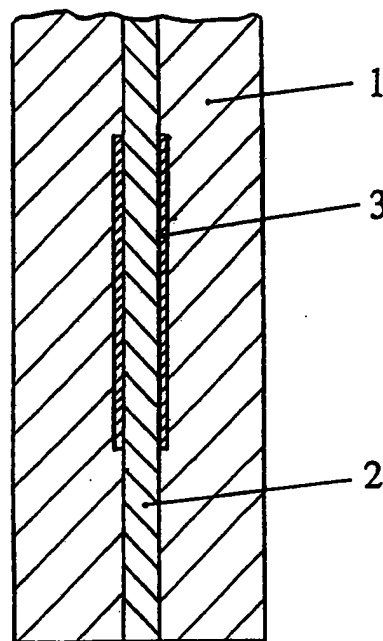


Fig. 1

2/13

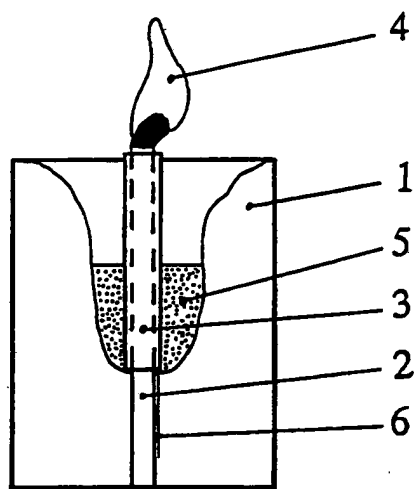


Fig. 2

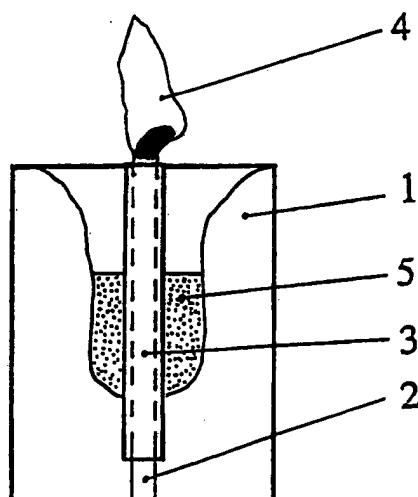


Fig. 3

3/13


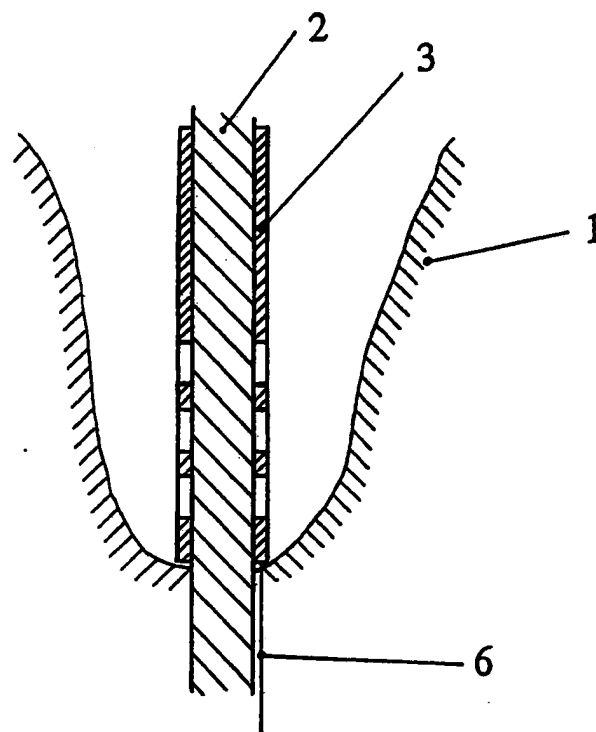


Fig. 4



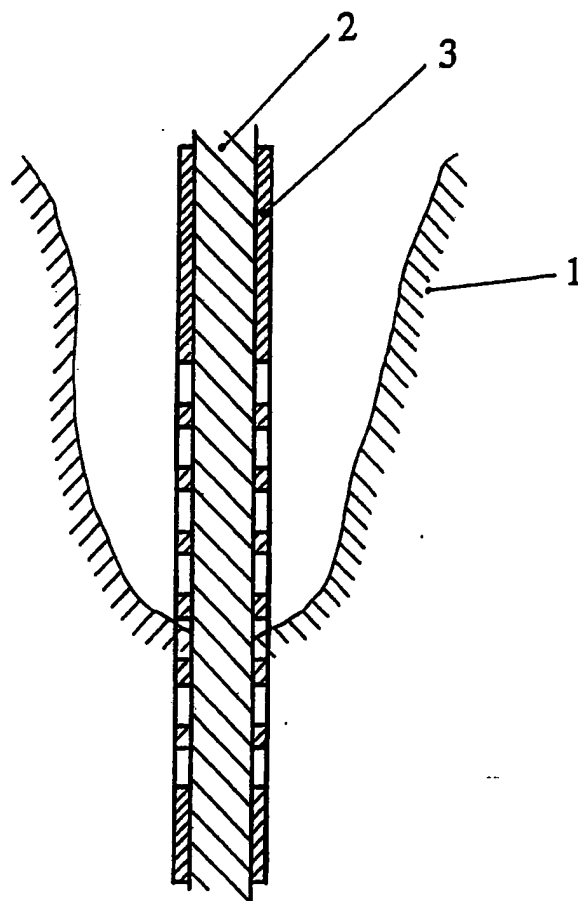

5/13



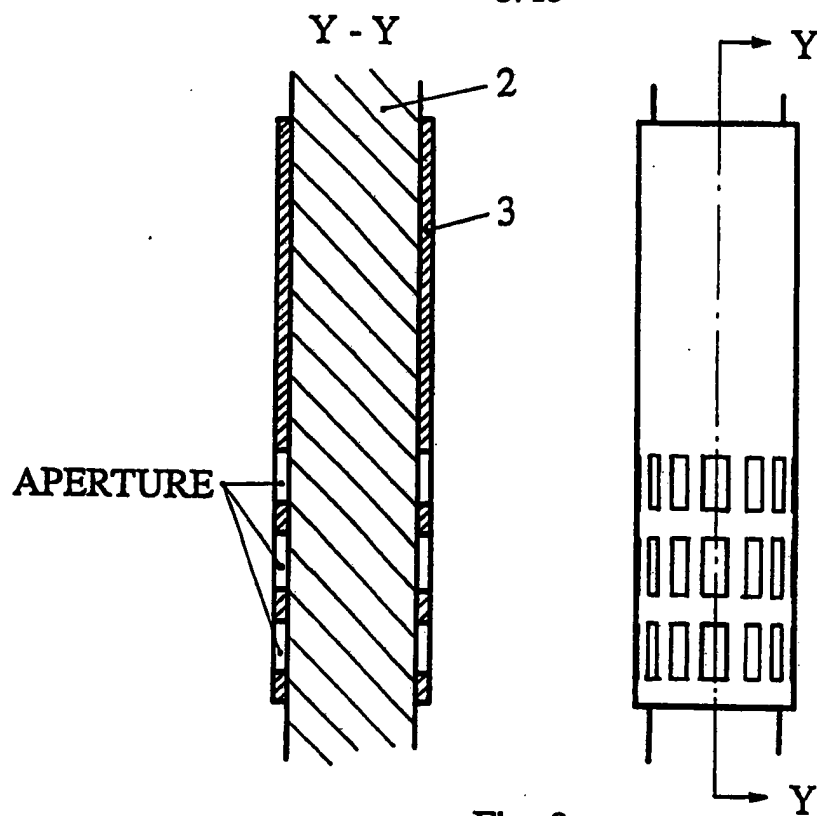


Fig. 8

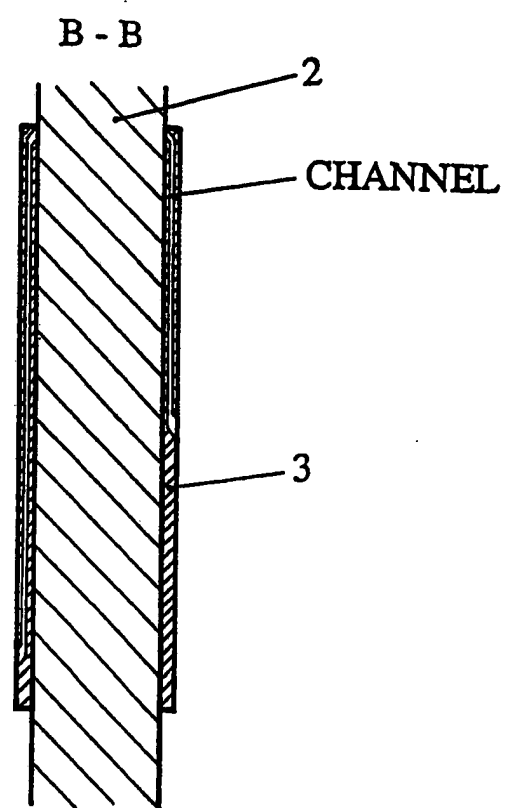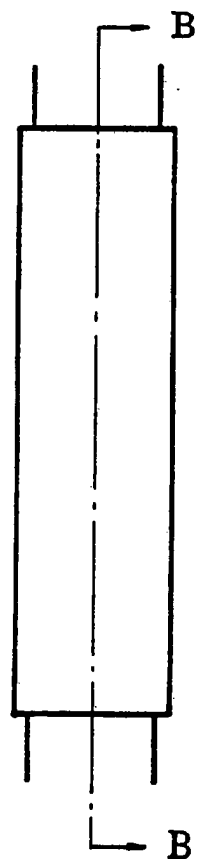

6/13




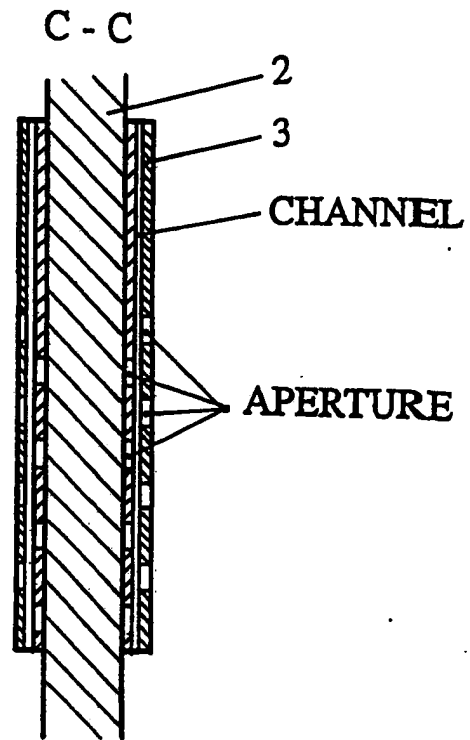


Fig. 10

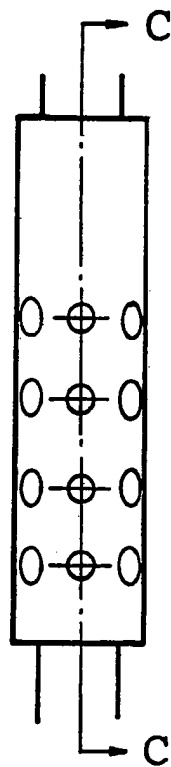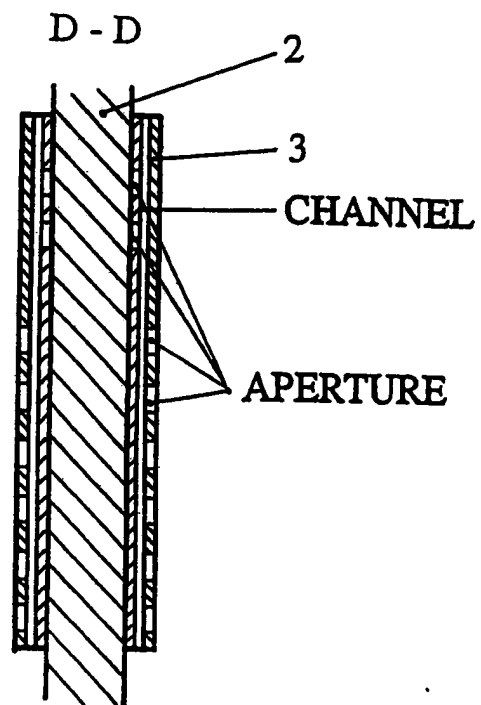

7/13

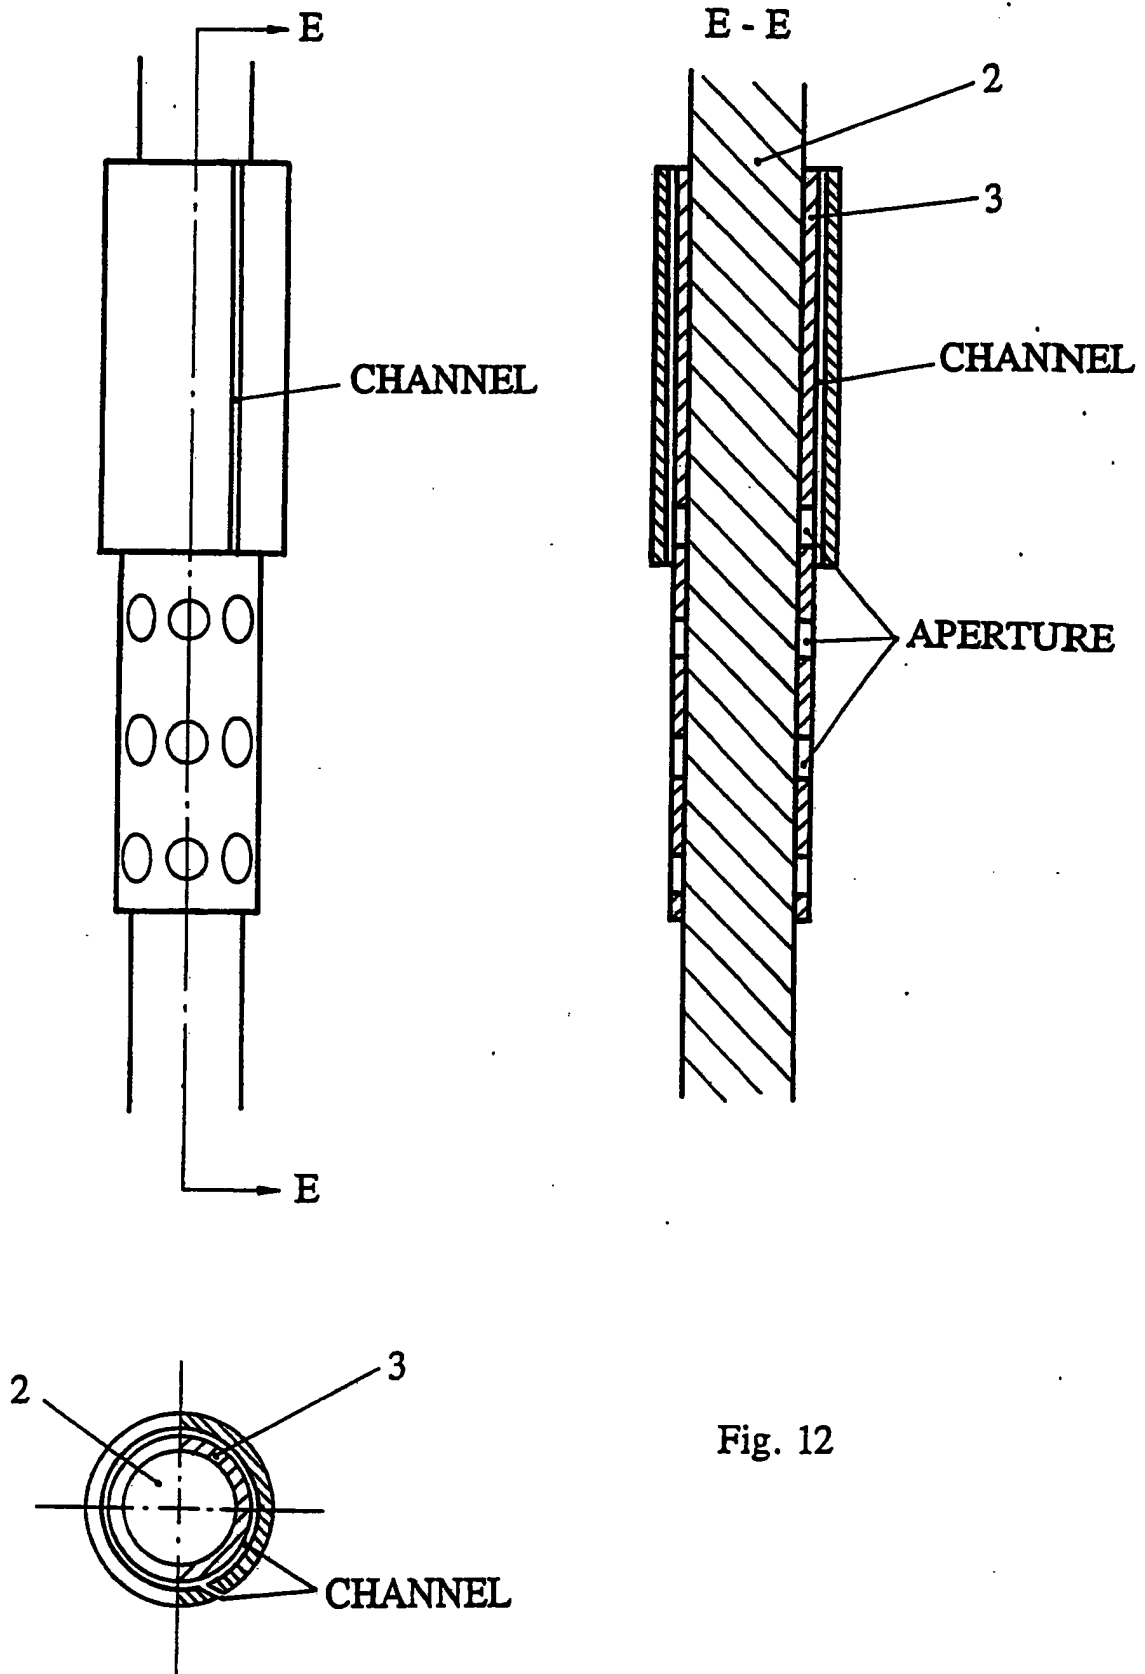


Fig. 12



8/13

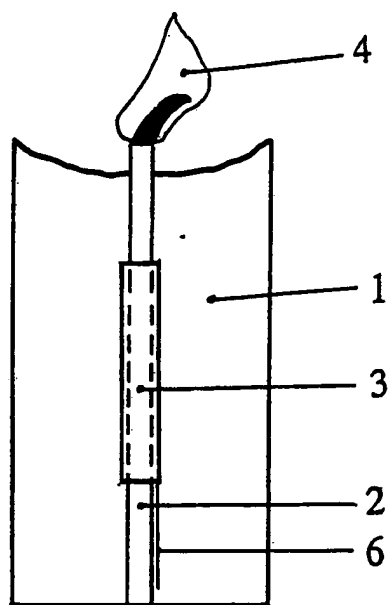


Fig. 13

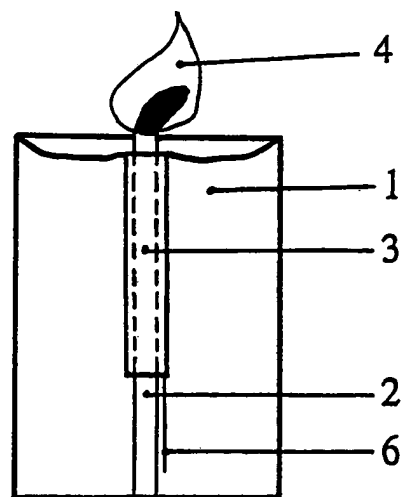


Fig. 14

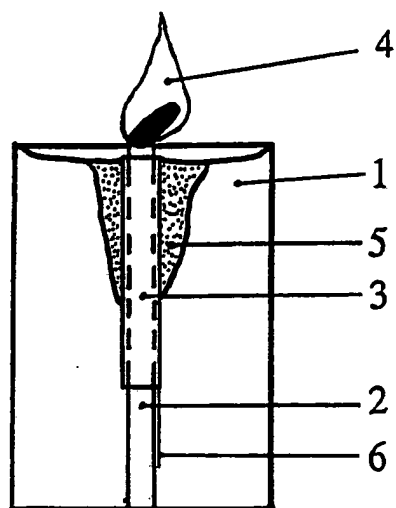


Fig. 15

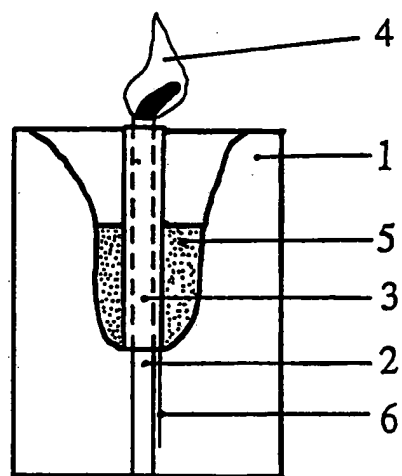


Fig. 16

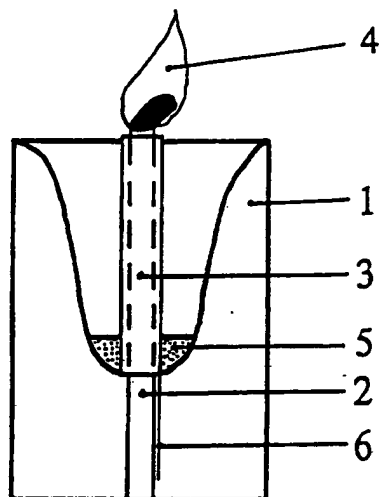


Fig. 17

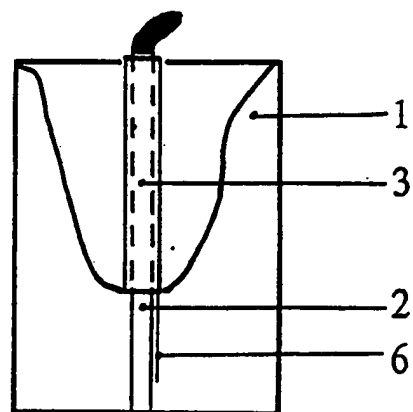


Fig. 18

9/13

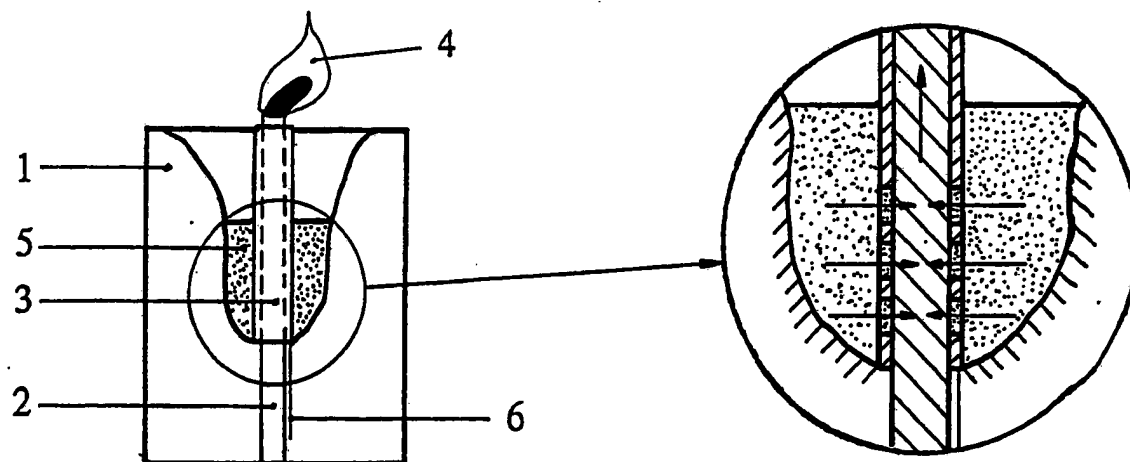


Fig. 19

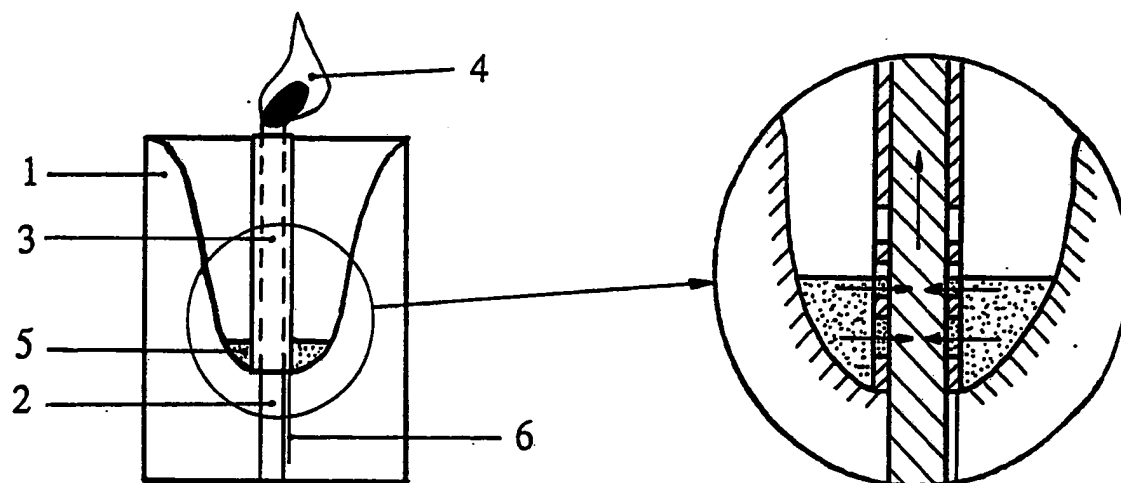


Fig. 20

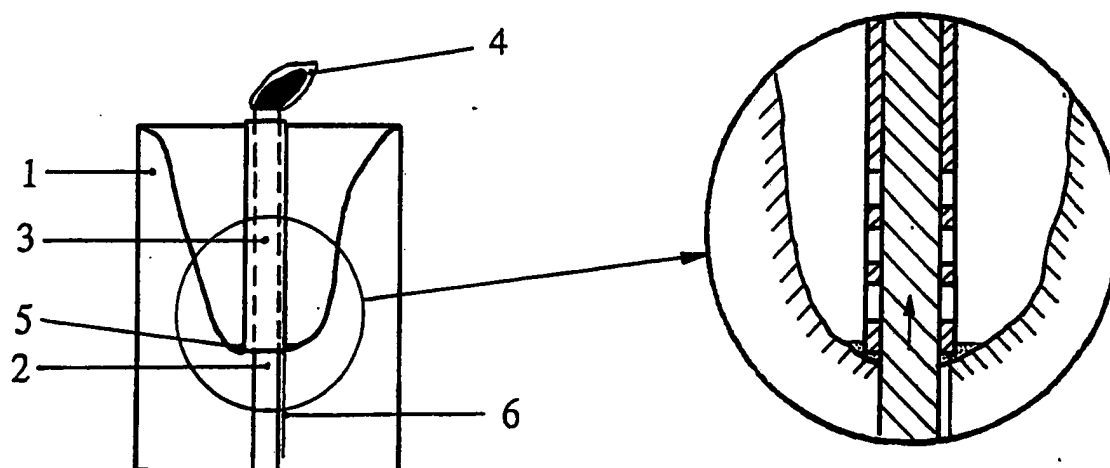


Fig. 21

10/13

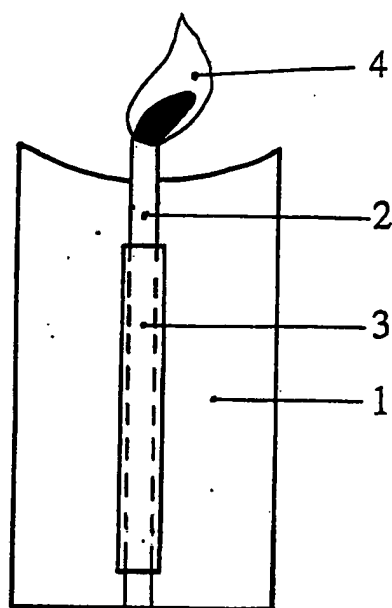


Fig. 22

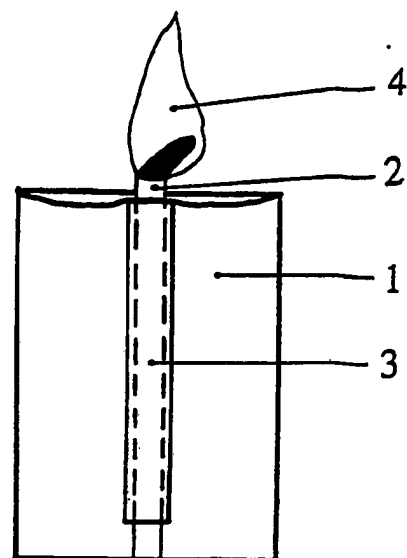


Fig. 23

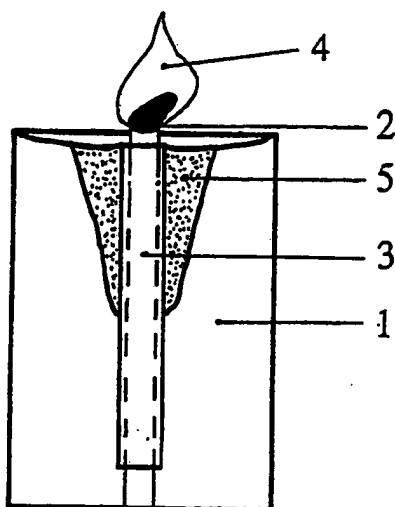


Fig. 24

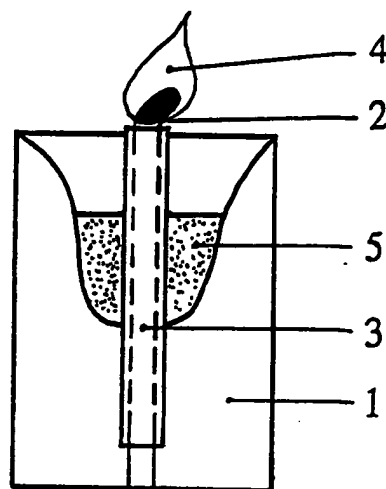


Fig. 25

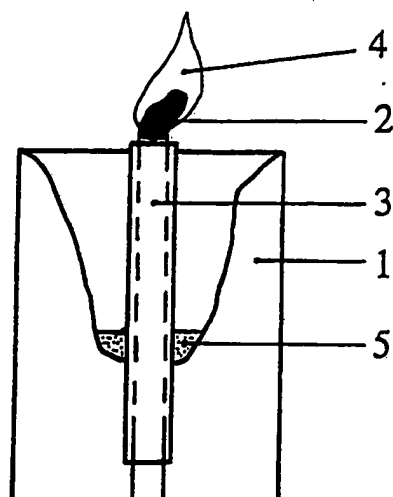


Fig. 26

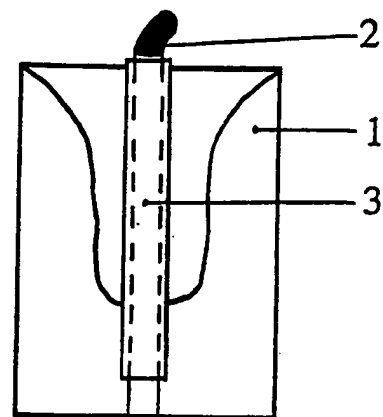


Fig. 27

11/13

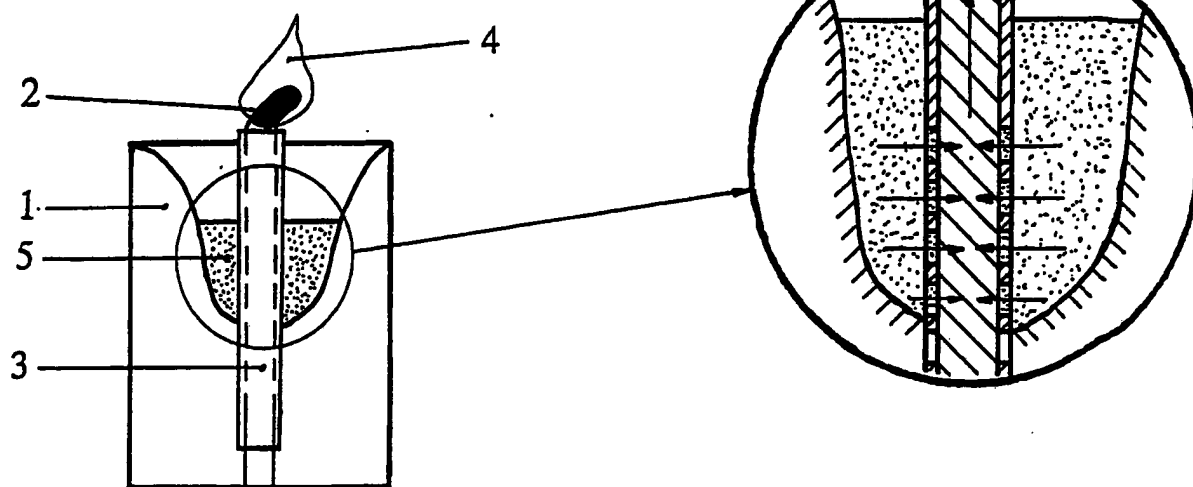


Fig. 28


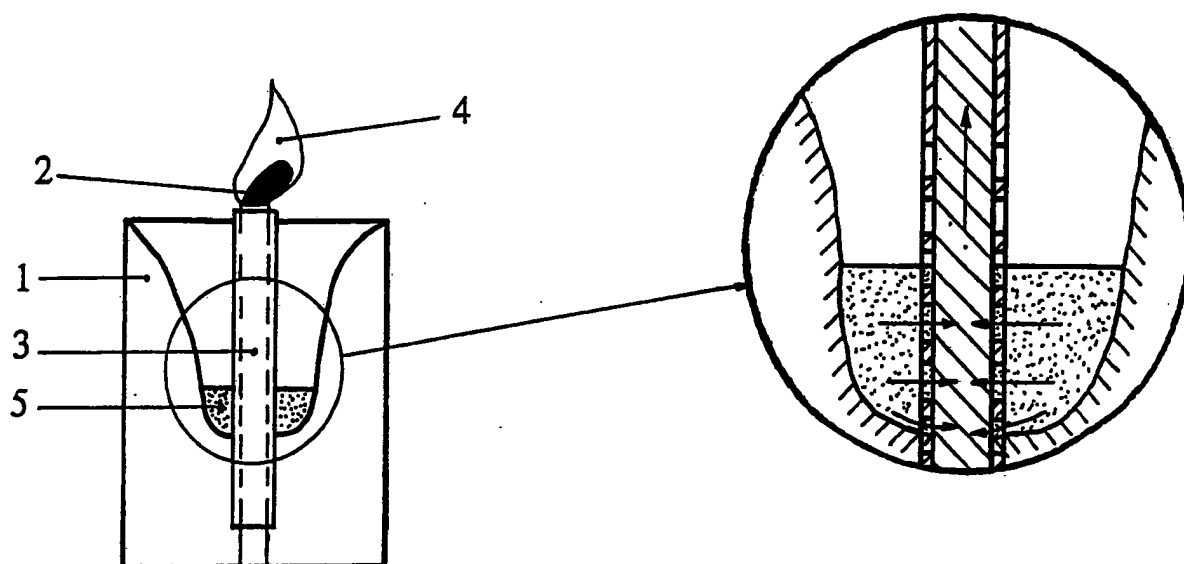


Fig. 29

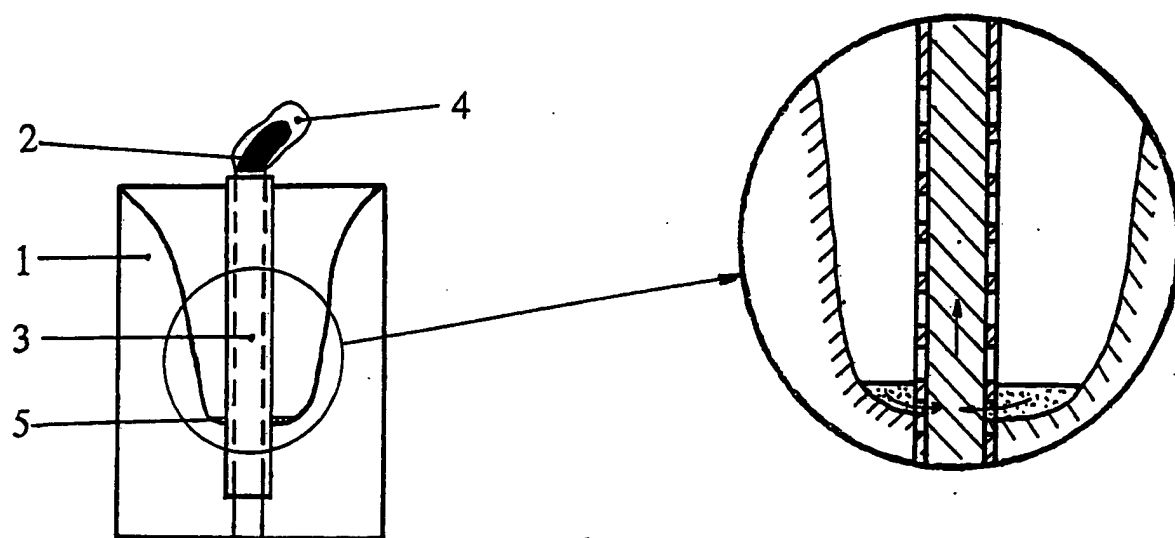

12/13

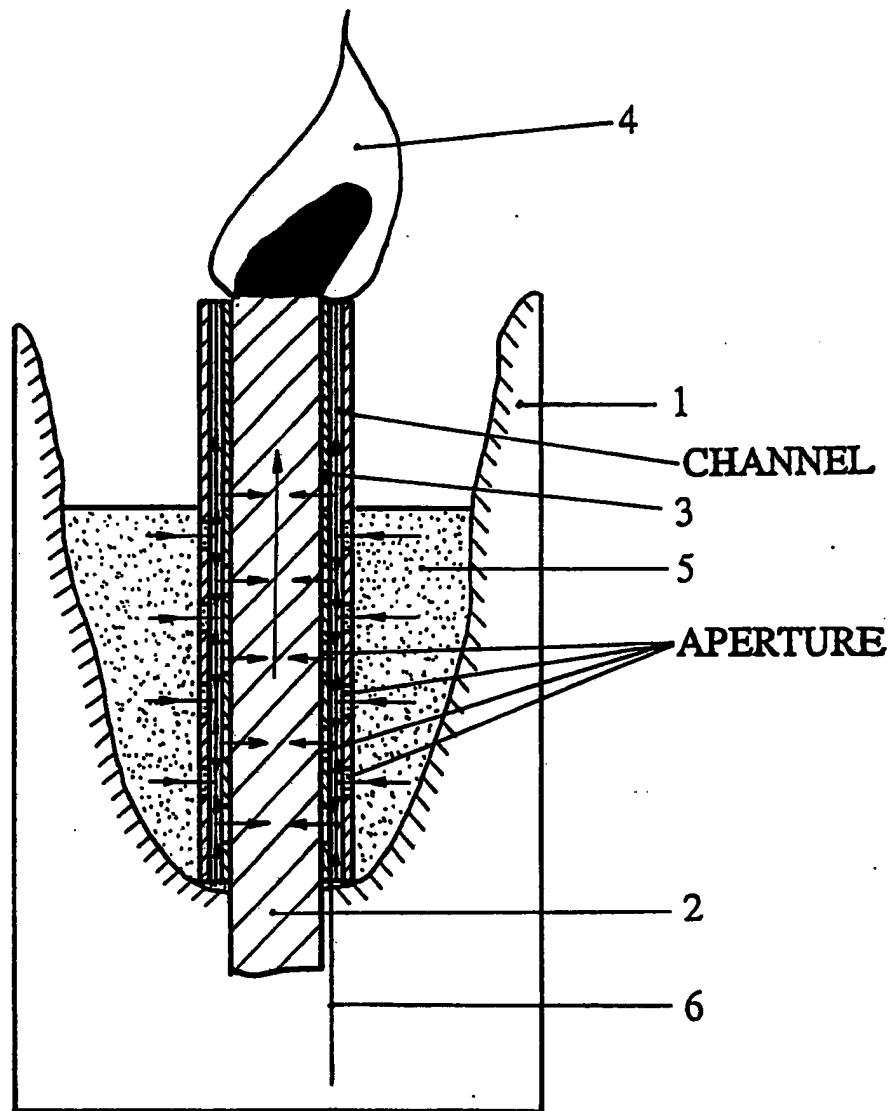


Fig. 31

13/13

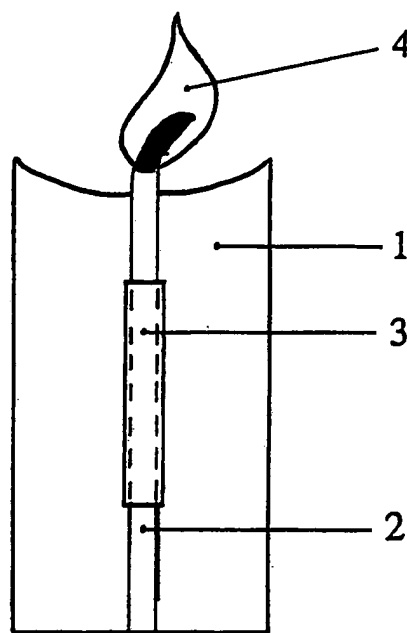





Fig.32

# INTERNATIONAL SEARCH REPORT

International Application No **PCT/SE 91/00757**

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC <b>IPC5: C 11 C 5/00</b>														
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched<sup>7</sup></div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border: 1px solid black;">Classification System</th> <th style="border: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; height: 40px; vertical-align: bottom;">IPC5</td> <td style="border: 1px solid black; vertical-align: bottom;">C 11 C; F 23 Q</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched<sup>8</sup></div> <p style="padding: 5px;">SE,DK,FI,NO classes as above</p>			Classification System	Classification Symbols	IPC5	C 11 C; F 23 Q								
Classification System	Classification Symbols													
IPC5	C 11 C; F 23 Q													
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; border: 1px solid black;">Category *</th> <th style="border: 1px solid black;">Citation of Document,<sup>11</sup> with indication, where appropriate, of the relevant passages<sup>12</sup></th> <th style="width: 15%; border: 1px solid black;">Relevant to Claim No.<sup>13</sup></th> </tr> </thead> <tbody> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">GB, A, 16986/1891 (G.E. FARROW) 14 November 1891, see page 1, line 24 - line 35 ---</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-4</td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">EP, A1, 0018839 (KENT, F.M.J.) 12 November 1980, see page 4, line 23 - line 30 ---</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-4</td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top;">A</td> <td style="border: 1px solid black; vertical-align: top;">FR, A, 1423888 (KAMEYAMA ROSOKU KABUSHIKI KAISHA) 29 November 1965, see Résumé -- -----</td> <td style="border: 1px solid black; text-align: center; vertical-align: top;">1-4</td> </tr> </tbody> </table>			Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>	A	GB, A, 16986/1891 (G.E. FARROW) 14 November 1891, see page 1, line 24 - line 35 ---	1-4	A	EP, A1, 0018839 (KENT, F.M.J.) 12 November 1980, see page 4, line 23 - line 30 ---	1-4	A	FR, A, 1423888 (KAMEYAMA ROSOKU KABUSHIKI KAISHA) 29 November 1965, see Résumé -- -----	1-4
Category *	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>												
A	GB, A, 16986/1891 (G.E. FARROW) 14 November 1891, see page 1, line 24 - line 35 ---	1-4												
A	EP, A1, 0018839 (KENT, F.M.J.) 12 November 1980, see page 4, line 23 - line 30 ---	1-4												
A	FR, A, 1423888 (KAMEYAMA ROSOKU KABUSHIKI KAISHA) 29 November 1965, see Résumé -- -----	1-4												
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"a" document member of the same patent family</p> </div> </div>														
<b>IV. CERTIFICATION</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of the Actual Completion of the International Search   <b>5th February 1992</b> </td> <td style="width: 50%; border: 1px solid black; padding: 5px;">           Date of Mailing of this International Search Report   <b>1992 -02- 0 7</b> </td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">           International Searching Authority   <div style="text-align: center;"><b>SWEDISH PATENT OFFICE</b></div> </td> <td style="border: 1px solid black; padding: 5px;">           Signature of Authorized Officer  <div style="text-align: center;">   <b>Anders Bruun</b> </div> </td> </tr> </table>			Date of the Actual Completion of the International Search  <b>5th February 1992</b>	Date of Mailing of this International Search Report  <b>1992 -02- 0 7</b>	International Searching Authority  <div style="text-align: center;"><b>SWEDISH PATENT OFFICE</b></div>	Signature of Authorized Officer <div style="text-align: center;">   <b>Anders Bruun</b> </div>								
Date of the Actual Completion of the International Search  <b>5th February 1992</b>	Date of Mailing of this International Search Report  <b>1992 -02- 0 7</b>													
International Searching Authority  <div style="text-align: center;"><b>SWEDISH PATENT OFFICE</b></div>	Signature of Authorized Officer <div style="text-align: center;">   <b>Anders Bruun</b> </div>													

**ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO.PCT/SE 91/00757**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.  
The members are as contained in the Swedish Patent Office EDP file on 30/11/91  
The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0018839	80-11-12	GB-A- 2048300 JP-A- 55152797	80-12-10 80-11-28
FR-A- 1423888	65-11-29	NONE	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**